

CIRCULAR POLARISED

UHF SHELF ANTENNA SlimLine - A7030C

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organisations to transform processes & reduce costs.

Our SlimLine range of antennas are unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form. Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.



The SlimLine A7030C

Unique, ultra-low profile circular polarised flat panel antenna

Just 8.5 mm / 0.3 in. thick

Innovative 'Array-Ability' design - easily customised & scalable

Typical applications:
Retail item level tracking,
tool tracking &
all shelving / cabinet applications

Part of the SlimLine range of shelving antennas, the A7030C with its innovative 'Array-Ability' design offers a highly scalable and customised antenna solution for a wide range of RFID deployments. At just 8.5 mm / 0.3 in. thick, the A7030C combines ultra-low profile and intelligent scalable design, with the performance of a circular polarised UHF antenna. With a highly durable Kydex radome and flexible easy mounting options, including the use of innovative 'Array-Ability' feet, the A7030C is ideal for existing shelving systems, providing real-time asset & inventory management – it's quite simply the smartest antenna on the shelf.


Physical / Environmental Specifications

Dimensions (LxWxD):	300 mm x 300 mm x 8.5 mm (11.5 mm / with feet) 11.8 in. x 11.8 in. x 0.3 in. (0.4 in. / with feet)	
Weight:	750 g / 1.6 lbs.	
Radome Material:	Fire retardant Kydex	
Environmental Rating:	IP54	
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F	
Mounting:	Integrated mounting guides	
Connector type / position:	SMA female side fly lead (400 mm / 15 ¾ in.) Custom lengths are available for array options	
Cable:	2m SMA to RPTNC (included)	


Electrical Specifications

Band:	ETSI	FCC
Frequency Range:	864 – 869 MHz	902 – 928 MHz
Polarisation:	Circular	Circular
Far-field Gain:	5dBic	6dBic
Far-field 3dB beamwidth:	65° in vertical, 65° in horizontal	65° in vertical, 65° in horizontal
Typical VSWR across frequency range:	< 1.4:1	< 1.4:1
Front to back ratio:	22dB	17dB
Axial Ratio:	typ: 2dB	typ: 3dB / max: 4dB
Nominal Impedance:	50 Ω	50 Ω
Anti-static protection:	Yes	Yes
Maximum Input Power:	6 W	6 W


E-field elevation & Azimuth Patterns

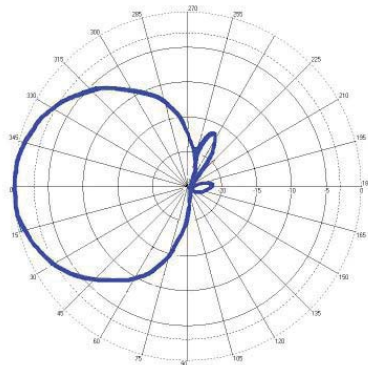

Vertical

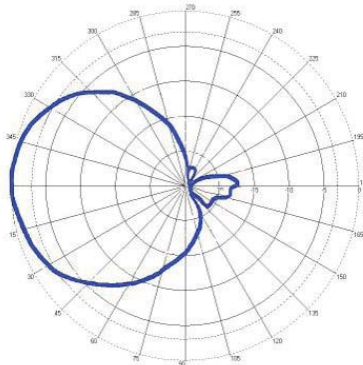

Horizontal

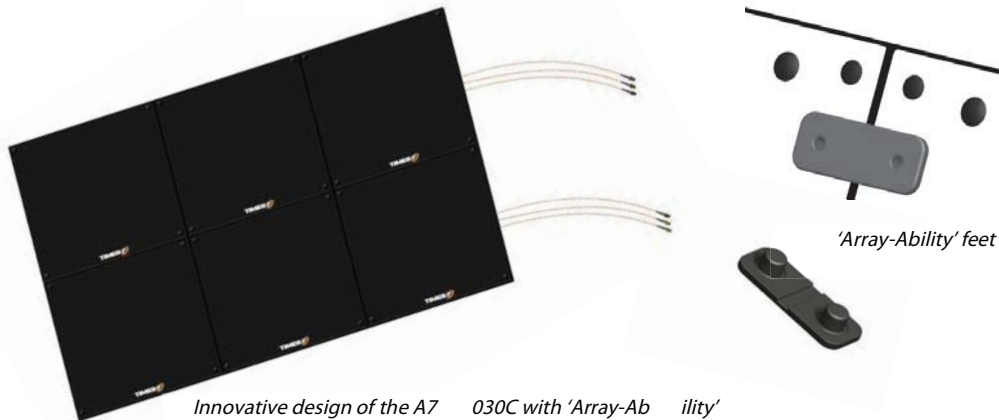

Innovative design of the A7030C with 'Array-Ability'

Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
A7030C	ETSI 864-869 MHz	71582
A7030C	FCC 902-928 MHz	71584
Cable 4m, SMA to RPTNC		71437
Cable 8m, SMA to RPTNC		71438

Applications

- Retail / Jewelry item level tracking
- Workshop / Industrial Tool tracking
- All Shelving / Cabinet applications



OUR GLOBAL NETWORK

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

TransTech Systems, Inc.
12142 NE Sky Lane
Suite 130
Aurora, OR 97002

Ph: 888-843-3643
Fax: 503-682-0166

sales@ttsys.com
www.ttsys.com